NOVASPOT APPLIQUE IP65

Outdoor and wet locations



IP65 recessed LED spotlight for general lighting installations. Aluminium body, tempered glass cover.

WALL | IP 65 PROTECTION | CLASS III | 10W POWER

2700K CCT | >90 CRI | Remote DRIVER

CONTROL · ON REQUEST DALI

GENERAL

Category	COB LED
Environment	IP65
IP rating	IP65
Installation	Wall installation
Power	10W
Colour temperature	2700K
Colour rendering (CRI)	>90
Luminaire flux	1200Lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Spot
Beam angle	Medium


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Finish	Dark grey
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

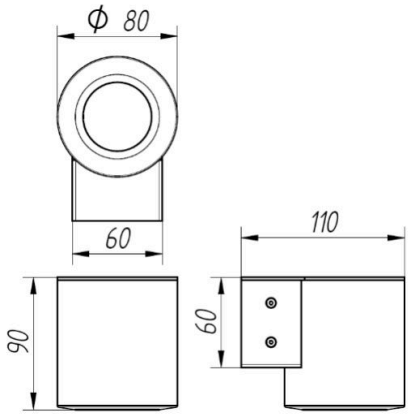

NOTES

- DALI dimmable on request.
- DRAFT - All technical features are to be confirmed.