ARGE MINI *Track framing projector*



Fully adjustable low-voltage LED track luminaire for concentrated, sharp and precise light emission even over long distances. Suitable for art galleries. Designed for projecting custom logos. Aluminium body. Very high R9 value for naturally saturated red colour rendering.

TRACK	IP 40 PROTECTION	CLASS III	12W POWER
3000K CCT	98 CRI	Integrated DRIVER	

GENERAL

Category	Track framing projector
Environment	Indoor
IP rating	IP40
Installation	Low-voltage miniaturised track
Power	12W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	1332Lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Refractive PMMA
Beam angle	Variable


ELECTRICAL

Driver	Integrated
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	650gr
Finish	Any RAL and NCS code
Material	Aluminium
Rotation	+/- 180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

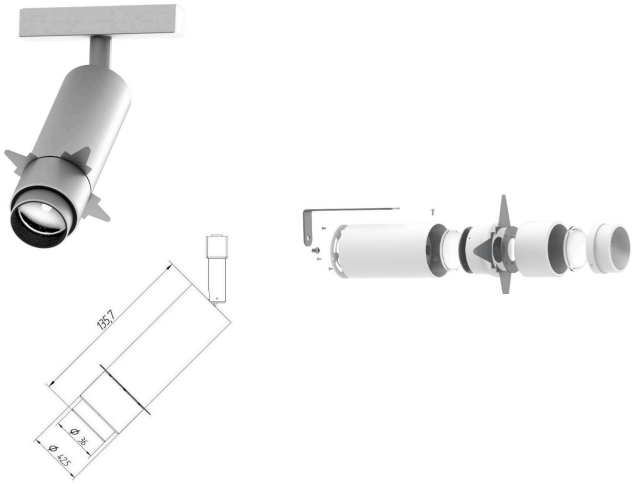

NOTES

- Dimmable with constant current driver not included.
- Also available in a constant current surface-mounted version for recessed installation in false ceilings.
- Fully customisable luminaire.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.