SMA – NANO PLA

Showcases and jewellery displays



Adjustable spotlight. Very small size. Suitable for installation in furniture or showcases.

SHOWCASE	IP 40 PROTECTION	CLASS III	1W POWER
2700K CCT	90 CRI	30° BEAM	Remote DRIVER

CONTROL DALI

GENERAL

Category	LED
Environment	Indoor
IP rating	IP40
Installation	Ceiling, showcase, shelves
Power	1W
Colour temperature	2700K
Colour rendering (CRI)	90
Source flux	150lm

OPTICS

Emission	Fixed mini downlight
LED source	LED Mid Power
Distribution	Symmetric
Optics	Refractive
Beam angle	30°


ELECTRICAL

Driver	Remote
Power supply	350mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø5.5-6.5mm
Finish	Painted brass + RAL 9005
Material	Aluminium
Rotation	360°
Tilt	100°

TECHNICAL DRAWINGS AND DETAILS

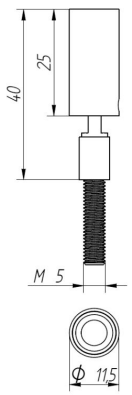

NOTES

- Remote ON/OFF or DALI dimmable driver to be selected according to the architectural design and the number of spotlights to be controlled.
- Magnetic fixing plate and M5 adjustable base also available.
- Available in brass or stainless steel.