
LEILA 3X *Surface-mounted luminaire*

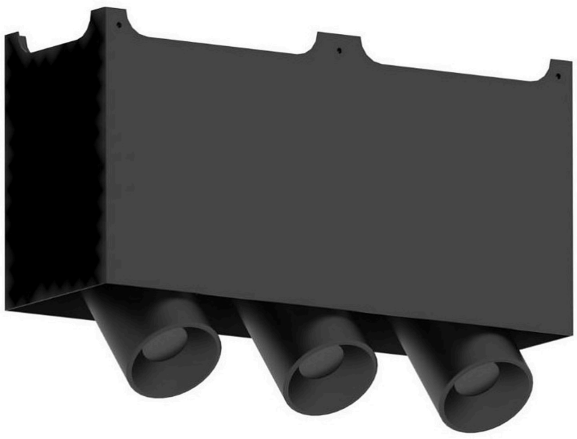

Surface-mounted luminaire with three adjustable and removable spotlights. At the back, the box is designed to house the driver and controller if required. Medium-gloss black finish, with gloss black painted collar for anti-glare effect. Ceiling fixing screws not supplied, to be chosen according to the type of ceiling.

SURFACE	IP 40	CLASS III	15W
PROTECTION			POWER

2700K	24–60°	Remote
CCT	BEAM	DRIVER

GENERAL

Category	Surface-mounted luminaire
Environment	Indoor
IP rating	IP40
Installation	Ceiling-mounted with screws (not supplied)
Power	3×15W
Colour temperature	2700K

OPTICS

Emission	Direct
LED source	COB
Distribution	Symmetric
Optics	Refractive optics
Beam angle	24°, 38°, 60°

ELECTRICAL

Driver	Remote (or mounted on the back)
Power supply	700mA
Insulation class	III
Control	Yes, with remote control system

MECHANICAL

Dimensions	See drawing
Weight	850gr
Finish	RAL9005
Material	Aluminium, PMMA
Rotation	359°
Tilt	0/40°

NOTES

- Mechanical and optical features are fully customisable.
- Also available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.

ACCESSORIES AND OPTIONS

- Optional galvanic finishes, quoted separately.

TECHNICAL DRAWINGS AND DETAILS

