
QBO M PLA MIRROR *Surface-mounted projector*

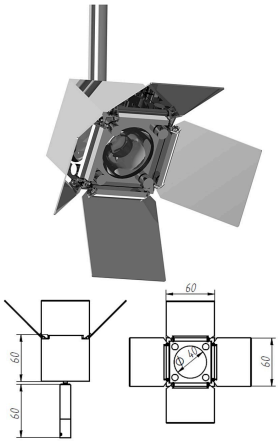

Fully customisable and adjustable LED luminaire for false ceiling installation, with a minimal external housing. Aluminium body, PMMA lens. Direct light. Mirror-finish surfaces. Paint finish according to RAL and NCS codes. Very high R9 value for naturally saturated red colour rendering.

SURFACE	IP 40	12W	3000K
SURFACE	PROTECTION	POWER	CCT

98	18°	Remote
CRI	BEAM	DRIVER

CONTROL · ON REQUEST DALI

GENERAL

Category	Surface-mounted projector
Environment	Indoor
IP rating	IP40
Installation	Ceiling-mounted with recessed housing
Power	12W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	1266Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Refractive optics
Beam angle	18°


ELECTRICAL

Driver	Remote
Power supply	700mA

MECHANICAL

Weight	200gr
Finish	Mirror finish
Material	Aluminium / steel / PMMA
Rotation	+/- 180°
Tilt	0/90°

TECHNICAL DRAWINGS AND DETAILS

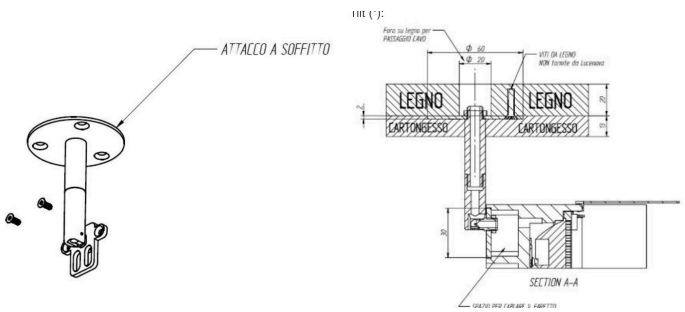

NOTES

- Mechanical and optical features are fully customisable.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 18°, 24°, 38°, 60°.
- DALI dimmable on request.

ACCESSORIES AND OPTIONS

- Optional: gloss black painted inner collar for anti-glare effect.
- Optional galvanic finishes (e.g. gold, nickel, burnishing).
- Recessed housing to be installed in the false ceiling