NOVA SPIRIT 1509 *Recessed linear*



Fully customisable linear LED luminaire, recessed or flush-mounted in showcases, displays and furniture. Available in made-to-measure lengths. Continuous line light beam. Aluminium body, PMMA lens, direct light. High R9 value, for naturally saturated red colour rendering. Dimmable.

LINEAR	IP 40 PROTECTION	CLASS III	≤ 20W/m POWER
3000K CCT	>90 CRI	70° BEAM	Remote DRIVER

GENERAL

Category	Recessed linear
Environment	Indoor
IP rating	IP40
Installation	Recessed or with magnets
Power	Up to 20W/m
Colour temperature	3000K
Colour rendering (CRI)	>90
Source flux	2149Lm/m
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	Refractive PMMA lens
Beam angle	70°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	0.3Kg/m
Finish	Any RAL or NCS code
Material	Aluminium, PMMA

TECHNICAL DRAWINGS AND DETAILS

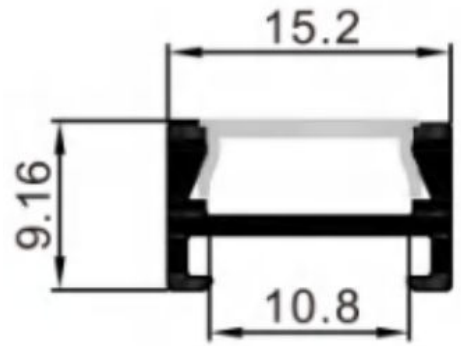

NOTES

- All features are to be confirmed following prototype analysis.
- Dimmable on request with external remote driver.
- Driver to be ordered separately.
- The luminaire must be powered every two and a half metres.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K.
- Magnetic fixing on request.