PS – GROUND MINI *Wall projector*

DATASHEET BEING UPDATED



Luminaire for wall installation in outdoor spaces. Aluminium and tempered glass body. Direct light. On-board driver.

WALL	IP 68 PROTECTION	CLASS III	2W POWER
4000K CCT	90 CRI	40° BEAM	Remote DRIVER

CONTROL: DALI · Triac · 0-10V · Casambi

GENERAL

Category	Wall projector
Environment	Indoor and outdoor
IP rating	IP68
Installation	Wall installation
Power	2W
Colour temperature	4000K
Colour rendering (CRI)	90
Source flux	110Lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	40°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	0.010Kg
Finish	Aluminium
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

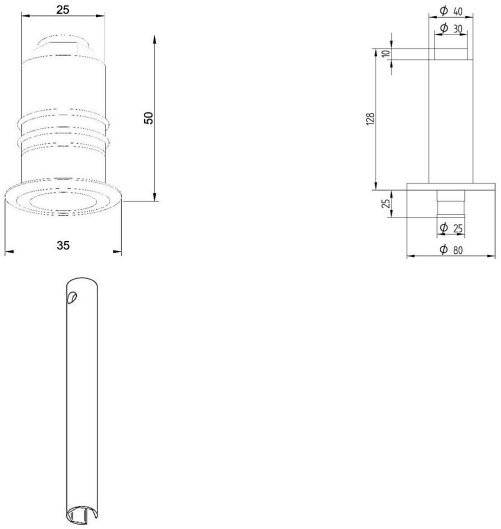

NOTES

- On/Off, Triac, DALI, 0-10V or Casambi without integrated driver.
- CRI97 on request.
- Supplied with power cable L: 20 m.
- Spotlight housing in 316L stainless steel.

ACCESSORIES AND OPTIONS

- Decorative accessory for spotlight.