EARTH L *Ground projector*



IP65 protection rating, ground installation in outdoor areas. Aluminium and tempered glass body. Direct light. On-board driver.

GROUND	IP 67 PROTECTION	CLASS I	12W POWER
2700K CCT	80 CRI	45–90° BEAM	Integrated DRIVER

CONTROL DALI

GENERAL

Category	Ground projector
Environment	Outdoor
IP rating	IP67
Installation	Ground installation
Power	12W
Colour temperature	2700K
Colour rendering (CRI)	80
Source flux	960lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Asymmetric
Optics	Refractor / diffuse
Beam angle	25*45°/90°


ELECTRICAL

Driver	On board
Power supply	230 VAC
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	5.300Kg
Finish	Aluminium
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

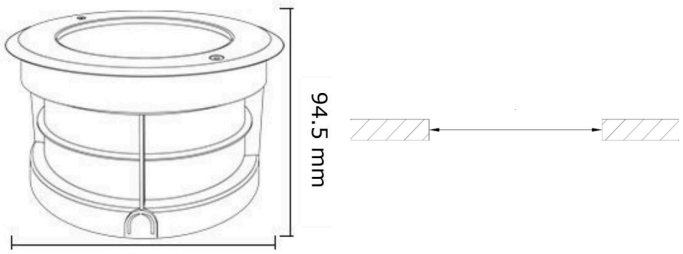

NOTES

- On/Off, DALI, with integrated driver.
- Cut-out: ø235mm