
FEMO ADJ VER.A

Outdoor and wet locations

Small size, high efficiency and clean design.

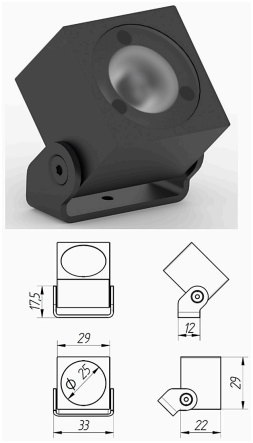

PROJECTOR	IP 54 PROTECTION	CLASS III	2W POWER
2700K CCT	>90 CRI	15° BEAM	Remote DRIVER

GENERAL

Category	LED
Environment	Indoor
IP rating	IP54
Installation	Ceiling
Power	2W
Colour temperature	2700K
Colour rendering (CRI)	>90
Luminaire flux	220lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Spot
Optics	Refractive optics
Beam angle	15°


ELECTRICAL

Driver	Remote
Power supply	200mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Finish	RAL to be defined
Material	Aluminium
Rotation	+/- 180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

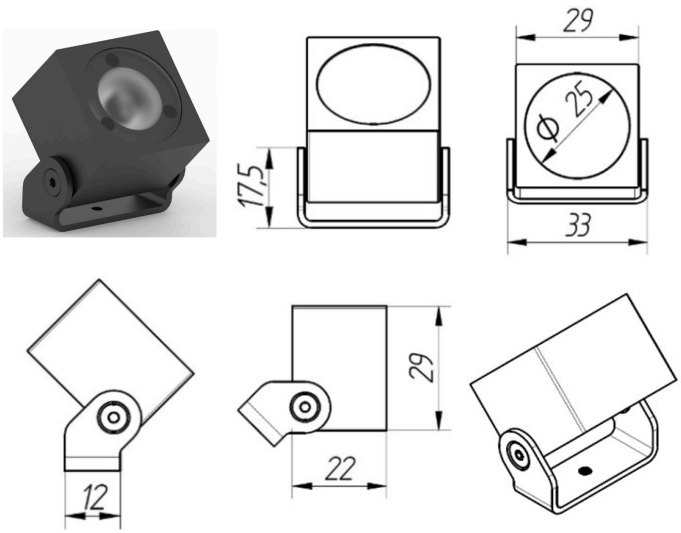

NOTES

- Remote driver to be selected according to the architectural design and the number of spotlights to be controlled.