
TORRETTA GIOIELLI *Recessed linear*

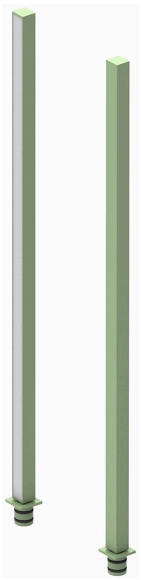

Fully customisable linear LED luminaire for recessed installation in showcases, displays and furniture. Dot–line–dot beam, aluminium body, opal PMMA diffuser included. Dimmable.

SHOWCASE	IP 40 PROTECTION	CLASS III	9W POWER
4000K CCT	90 CRI	70° BEAM	Remote DRIVER

GENERAL

Category	Recessed linear
Environment	Indoor
IP rating	IP40
Installation	Pin on the base
Power	9W
Colour temperature	4000K
Colour rendering (CRI)	90
Source flux	1670Lm/m
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED array
Distribution	Lambertian
Optics	Diffuse
Beam angle	70°

ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	0.6Kg/m
Finish	Green NCS-S 0515-G20Y
Material	Aluminium, PMMA
Rotation	360°

TECHNICAL DRAWINGS AND DETAILS



NOTES

- All features are to be confirmed through prototype analysis.
- Dimmable on request with remote external driver.
- Driver to be ordered separately.
- The luminaire must be powered on each individual element.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K.