
FRANK M WOOD

Recessed downlight





Adjustable trimless LED luminaire, recessed in false ceilings with metal recessed housing. Gloss black painted collar for an anti-glare effect. Aluminium body, PMMA lens, direct light. Natural anodised finish + 100% gloss RAL 9005. Very high R9 value, for naturally saturated red colour rendering.

RECESSED	IP 40 PROTECTION	CLASS III	12W POWER
3000K CCT	98 CRI	18° BEAM	Remote DRIVER

GENERAL

Category	Recessed downlight
Environment	Indoor
IP rating	IP40
Installation	In false ceiling with metal housing
Power	12W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	1266lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	18°


ELECTRICAL

Driver	Remote
Power supply	700 mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	0.38 kg
Finish	Natural anodised, RAL 9005
Material	Aluminium
Rotation	360°
Tilt	+/- 25°

TECHNICAL DRAWINGS AND DETAILS

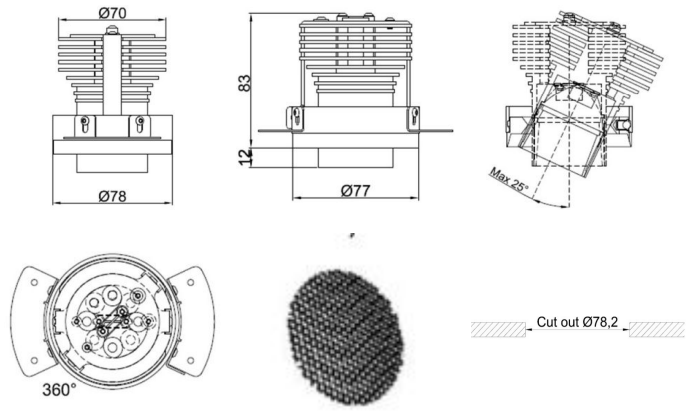

NOTES

- Driver to be ordered separately.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: 18°, 24°, 38°.
- Spotlight installation thickness: min 10 mm – max 15 mm.

ACCESSORIES AND OPTIONS

- Optional: honeycomb anti-glare filter.