
FUNNEL MSP ADJ *Recessed downlight*

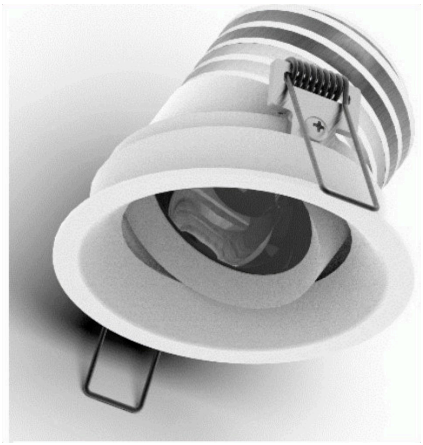

Adjustable, fully customisable LED luminaire, recessed in false ceilings. Aluminium body, PMMA lens, direct light. Paint finish according to RAL and NCS codes. Very high R9 value, for naturally saturated red colour rendering.

RECESSED	IP 40 PROTECTION	CLASS III	12W POWER
3000K CCT	98 CRI	15° BEAM	Remote DRIVER

GENERAL

Category	Recessed downlight
Environment	Indoor
IP rating	IP40
Installation	Recessed in false ceiling
Power	12W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	1332Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	15°


ELECTRICAL

Driver	Remote
Power supply	700 mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø70mm
Weight	150gr
Finish	Any RAL and NCS code
Material	Aluminium
Rotation	360°
Tilt	+/- 20°

TECHNICAL DRAWINGS AND DETAILS

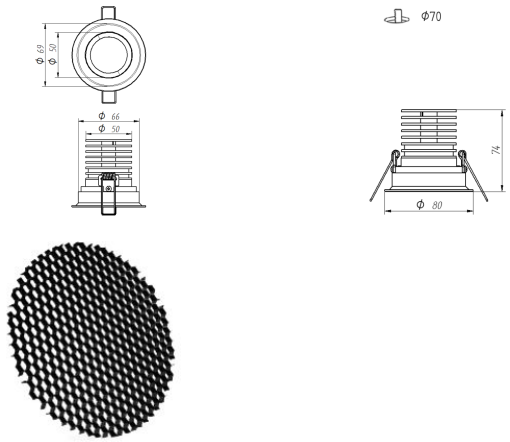

NOTES

- Dimmable with external remote constant current driver.
- Driver to be ordered separately.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: 15°, 25°, 38°, 60°.

ACCESSORIES AND OPTIONS

- Optional: honeycomb anti-glare filter.