OCULUS S FL IP65 *Recessed downlight*



Trimless LED luminaire recessed in false ceilings. Aluminium body. Direct light. Very high R9 index for naturally saturated red rendering. IP65 protection rating.

RECESSED	IP 65 PROTECTION	CLASS III	6W POWER
2700K CCT	97 CRI	Remote DRIVER	

GENERAL

Category	Recessed downlight
Environment	Indoor
IP rating	IP65
Installation	Ceiling recessed
Power	6W
Colour temperature	2700K
Colour rendering (CRI)	97
Source flux	520lm

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	Refractive
Beam angle	Medium


ELECTRICAL

Driver	Remote
Power supply	200mA to be confirmed
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø50mm
Weight	200gr
Finish	RAL9001
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

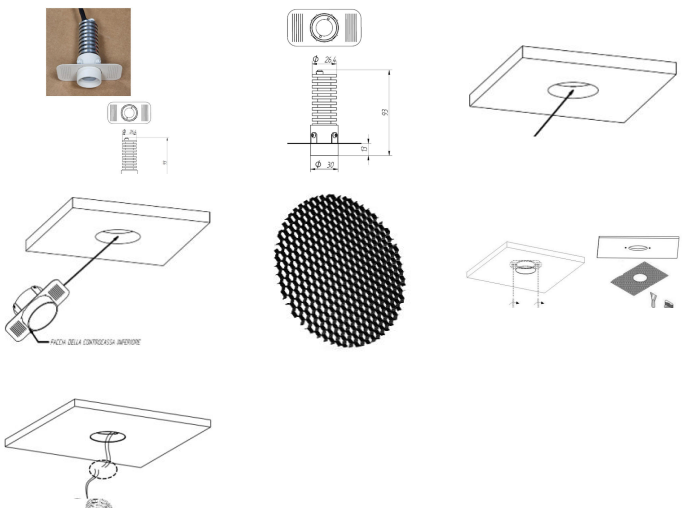

NOTES

- Fully customisable luminaire.
- Available in a constant voltage version.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: narrow, medium, wide.

ACCESSORIES AND OPTIONS

- Honeycomb anti-glare filter