ELVIS 25+25W L2LC *Wall light*



Fully customisable luminaire with dual light source: two powerful adjustable spotlights in the upper part of the structure. Suitable for indoor wall installations.

WALL	IP 40 PROTECTION	CLASS I	25W + 25W POWER
2700–4000K CCT	97 CRI	15–60° BEAM	Integrated DRIVER

GENERAL

Category	Wall light
Environment	Indoor
IP rating	IP40
Installation	Wall/ceiling
Power	25W + 25W
Colour temperature	2700K,3000K,3500K,4000K
Colour rendering (CRI)	Up to 97
Source flux	3540Lm

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA reflectors
Beam angle	15°, 30°, 60°.


ELECTRICAL

Driver	Integrated
Power supply	230Vac
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	600gr
Finish	Corten
Material	Aluminium
Rotation	+/- 180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

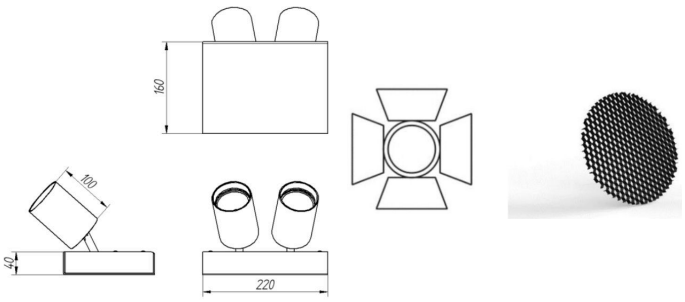

NOTES

- Mechanical and electrical features can be customised according to the customer's wishes.

ACCESSORIES AND OPTIONS

- Honeycomb anti-glare filter
- Barn doors