
NANO BULLET THECA MODULE

Showcases and jewellery displays

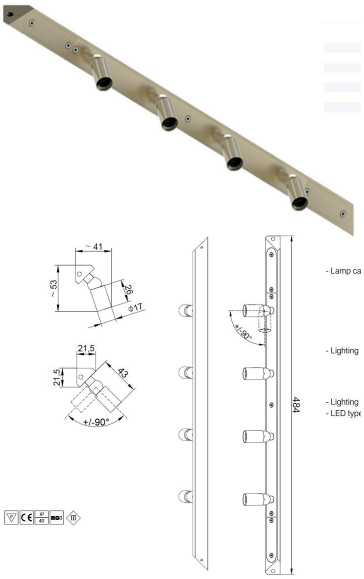

Fully customisable linear LED luminaire for installation in showcases, displays and furniture. Available in custom lengths. Double-dot beam, aluminium body, PMMA lens. Direct light. Dimmable.

SHOWCASE	IP 40	CLASS III	12W
PROTECTION			POWER
3500K	**90**	**25°**	**Remote**
CCT	CRI	BEAM	DRIVER

GENERAL

Category	LED
Environment	Indoor
IP rating	IP40
Installation	Showcase
Power	12W
Colour temperature	3500K
Colour rendering (CRI)	90
Source flux	Lm/m
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED Mid Power
Distribution	Symmetric
Optics	Refractive optics
Beam angle	25°

ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	0.45Kg
Finish	Any RAL and NCS code
Material	Aluminium
Rotation	+/- 90°
Tilt	+/- 90°

NOTES

- All features are to be confirmed through prototype analysis.
- Dimmable on request with remote external driver.
- Driver to be ordered separately.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K.