EARTH M *Ground projector*



Fixed luminaire with IP65 protection rating and plastic recessed housing for integration into concrete floors. Uniform, diffused beam with opal filter to soften the light. Suitable for ground installation in outdoor areas. Aluminium body, tempered glass and steel flange. Direct light. On-board driver.

GROUND	IP 65 PROTECTION	CLASS III	12W POWER
3000K CCT	80 CRI	120° BEAM	Remote DRIVER

CONTROL: DALI · Triac · 0-10V · Casambi

GENERAL

Category	Ground projector
Environment	Outdoor
IP rating	IP65
Installation	Ground installation
Power	12W
Colour temperature	3000K
Colour rendering (CRI)	80
Source flux	960Lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Refractor / diffuse
Beam angle	120°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	3.60Kg
Finish	Polished steel
Material	Aluminium body

TECHNICAL DRAWINGS AND DETAILS

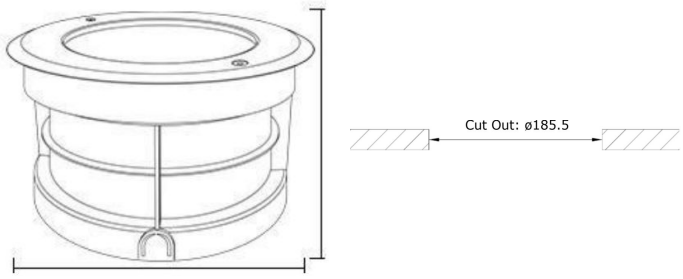

NOTES

- On/Off, Triac, DALI, 0-10V or Casambi without integrated driver.
- CRI97 on request.
- Supplied with power cable L: 20m
- Spotlight body in 316L stainless steel
- Cut-out: ø185.5
- Cut-out: ø235mm