GROUND *Uplight*



IP65 single-emission LED uplight; aluminium alloy.
Recessed housing to be ordered separately.

IN-GROUND	CLASS III	6W	2500K
		POWER	CCT

90	25°	Remote
CRI	BEAM	DRIVER

GENERAL

Category	Uplight
Environment	Outdoor
Installation	In-ground recessed
Power	6W
Colour temperature	2500K
Colour rendering (CRI)	90
Source flux	745lm

OPTICS

Emission	Uplight
LED source	COB
Distribution	Symmetric
Optics	Refractive
Beam angle	25°


ELECTRICAL

Driver	Remote
Power supply	350mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø62mm
Weight	350gr
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

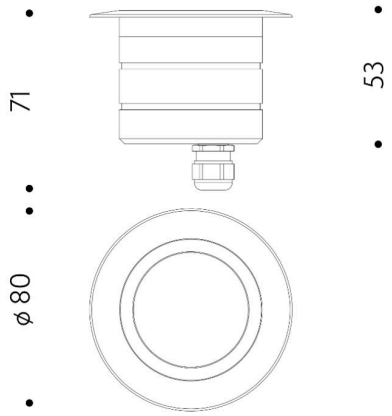

NOTES

- Dimmable with external constant current driver not included.
- Available with the following optics: 15°, 25°, 40°, 60°.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 6500K.
- Also available with 24Vdc constant voltage power supply.

- Custom galvanic finishes available
- AISI 316L stainless steel flange available for saline environments