
JAGO TRACK STANDARD M+ *Micro track projector*

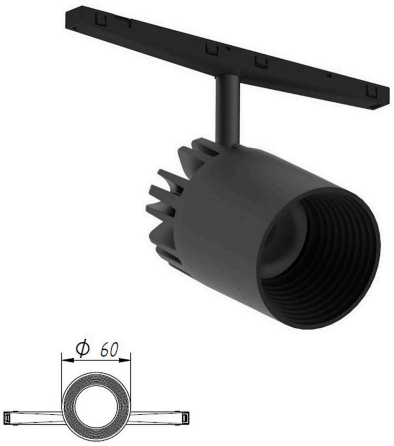

Adjustable, fully customisable LED luminaire for general lighting. Suitable for installation on low-voltage micro track in Class III. Aluminium body, PMMA lens, direct light. CRI value of no less than 90, for naturally saturated colour rendering.

TRACK	IP 40 PROTECTION	CLASS III	14W POWER
3500K CCT	90 CRI	15° BEAM	Remote DRIVER

GENERAL

Category	Micro track projector
Environment	Indoor
IP rating	IP40
Installation	Low-voltage micro track
Power	14W
Colour temperature	3500K
Colour rendering (CRI)	90
Source flux	2040Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Refractive optics
Beam angle	15°

ELECTRICAL

Driver	Remote
Power supply	24Vdc/48Vdc (to be confirmed)
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	400gr
Finish	Any RAL or NCS code
Material	Aluminium
Rotation	359°
Tilt	0/90°

NOTES

- Also available in the colour temperatures: 2700K, 3000K, 3500K, 4000K, 5700K.
- Available optics: 15°/24°/35°/60°.
- Dimmable on request.

ACCESSORIES AND OPTIONS

- Honeycomb anti-glare filter.

TECHNICAL DRAWINGS AND DETAILS

