COBRA *Showcase luminaire*



Adjustable vertical projector with aluminium body for showcase lighting.

SHOWCASE	IP 20 PROTECTION	CLASS III	4W POWER

3000 · 4000K CCT	90 CRI	60° BEAM

GENERAL

Category	Showcase luminaire
Environment	Indoor
IP rating	IP20
Installation	On flat surfaces with M12 nut
Power	4W
Colour temperature	3000K, 4000K
Colour rendering (CRI)	90
Luminaire flux	450lm

OPTICS

Emission	Direct
LED source	COB LED array
Distribution	Symmetric
Optics	Biconvex lens
Beam angle	60°


ELECTRICAL

Driver	Not included
Power supply	350mA
Insulation class	III

MECHANICAL

Recess cut-out	Diameter 12.5mm
Finish	According to RAL or NCS codes
Material	Aluminium
Rotation	+/- 359°
Tilt	+/- 45°

TECHNICAL DRAWINGS AND DETAILS

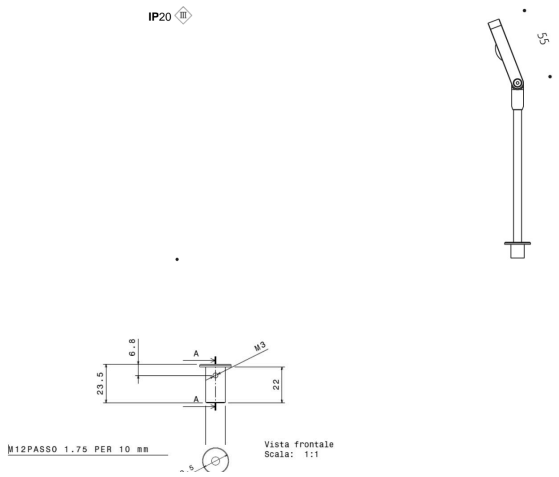

NOTES

- Driver to be ordered separately.