NABOO NAVY CEILING

Recessed and gimbal lights



High-performance recessed luminaire with LED source, tiltable and adjustable. Remote driver not included.

RECESSED	CLASS III	6W	3000K
		POWER	CCT

>90	30°
CRI	BEAM

GENERAL

Category	LED
Environment	Indoor
Installation	Ceiling recessed
Power	6W
Colour temperature	3000K
Colour rendering (CRI)	>90
Luminaire flux	338 lm at source

OPTICS

Emission	Direct
LED source	LED array
Distribution	Symmetric
Optics	1 LED
Beam angle	30°


ELECTRICAL

Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	Ø36×55 mm
Recess cut-out	Ø37mm
Weight	70g
Finish	On request
Material	Brass/aluminium
Rotation	30°
Tilt	360°

TECHNICAL DRAWINGS AND DETAILS

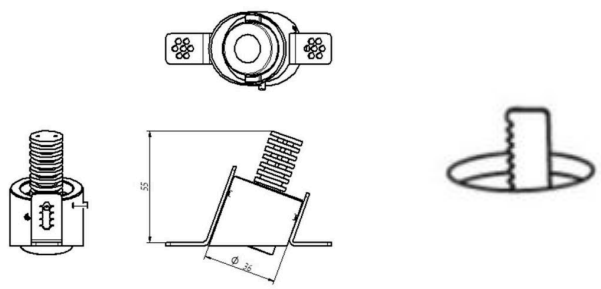

NOTES

- Dimmable with constant current driver (not included).

ACCESSORIES AND OPTIONS

- Anti-glare filter.