# MICRO SPIRIT 0808 *Linear luminaire*

IP65 aluminium LED bar with opal diffuser. For indoor and outdoor use. Aluminium body.



| LINEAR | IP 65 PROTECTION | CLASS III | 11W/m POWER |
|---|---|---|---|
| 2700K CCT | 90 CRI | 25° BEAM | Remote DRIVER |

CONTROL: DALI · Triac · 0-10V · Casambi

## GENERAL

| | |
|---|---|
| Category | Linear luminaire |
| Environment | Indoor and outdoor |
| IP rating | IP65 |
| Installation | Ceiling-mounted and recessed |
| Power | 11W/m |
| Colour temperature | 2700K |
| Colour rendering (CRI) | 90 |
| Source flux | 1190lm/m |

## OPTICS

| | |
|---|---|
| Emission | Direct |
| LED source | LED COB |
| Distribution | Symmetric |
| Optics | PMMA lens, refractor |
| Beam angle | 25° |


## ELECTRICAL

| | |
|---|---|
| Driver | Remote |
| Power supply | 24Vdc |
| Insulation class | III |

## MECHANICAL

| | |
|---|---|
| Dimensions | See drawing |
| Weight | 0.200Kg/m |
| Finish | Aluminium |
| Material | Aluminium |

### TECHNICAL DRAWINGS AND DETAILS

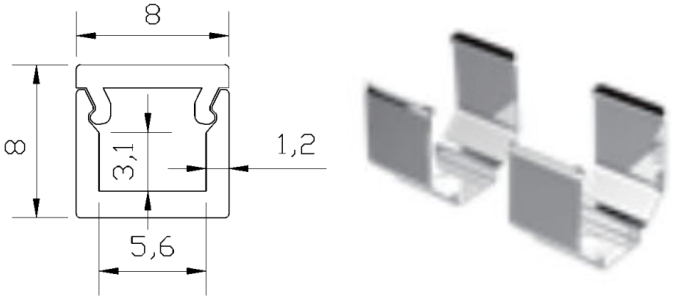


### NOTES

- On/Off, Triac, DALI, 0-10V or Casambi with remote driver.
- Stainless steel clip.