
NOVANOVA S PLA *Surface-mounted downlight*

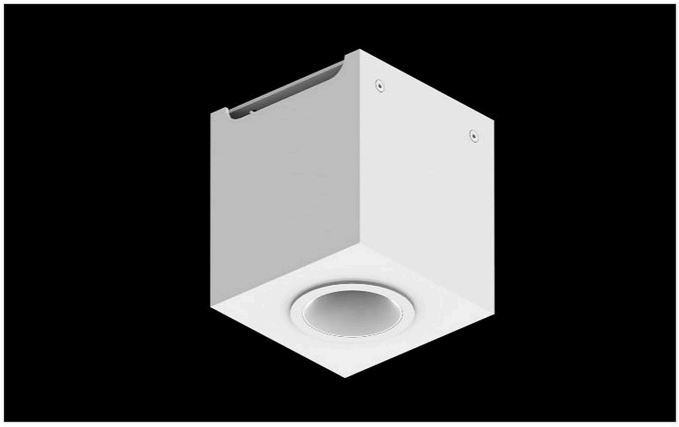

Adjustable LED luminaire for surface installation. Aluminium body, PMMA lens, direct light. Very high R9 value for naturally saturated red colour rendering.

SURFACE	IP 40	CLASS III	8W
PROTECTION			POWER

3000K	95	35°	Remote
CCT	CRI	BEAM	DRIVER

GENERAL

Category	Surface-mounted downlight
Environment	Indoor
IP rating	IP40
Installation	Surface-mounted
Power	8W
Colour temperature	3000K
Colour rendering (CRI)	95
R9	97
Source flux	844lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	35°


ELECTRICAL

Driver	Remote
Power supply	350 mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Diam. 95mm
Weight	0.25Kg
Finish	Anodised
Material	Aluminium
Rotation	360°
Tilt	+/-25°

TECHNICAL DRAWINGS AND DETAILS



NOTES

- Dimmable with remote external constant current driver.
- Integration of the driver inside the luminaire to be evaluated.
- Driver to be ordered separately.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 15°, 35°, 60°.