
NOVAMICROSPIRIT 1007 *Linear luminaire*

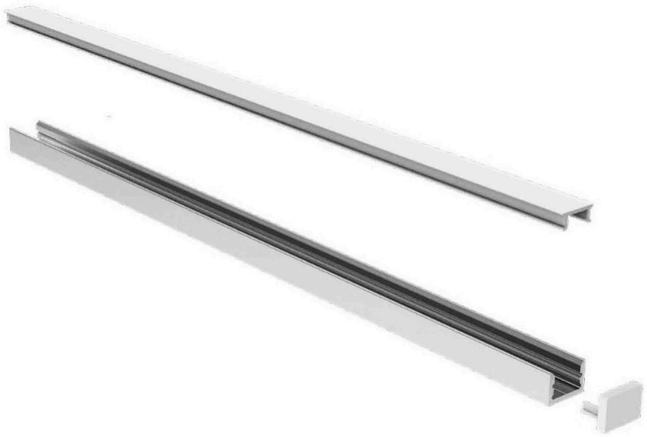

Fully customisable linear LED luminaire, recessed in showcases, displays and furniture. Available in made-to-measure lengths. Continuous line light beam. Aluminium body, PMMA lens, direct light. High R9 value, for naturally saturated red colour rendering. Dimmable.

LINEAR	IP 20 PROTECTION	CLASS III	12W/m POWER
2700K CCT	94 CRI	120° BEAM	Remote DRIVER

GENERAL

Category	Linear luminaire
Environment	Indoor
IP rating	IP20
Installation	On flat surfaces
Power	12W/m
Colour temperature	2700K
Colour rendering (CRI)	94
Source flux	1249Lm/m
LEDs per metre	203

OPTICS

Emission	Direct
LED source	LED strip
Distribution	Diffuse
Optics	Diffuser
Beam angle	120°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Material	PC - aluminium

TECHNICAL DRAWINGS AND DETAILS

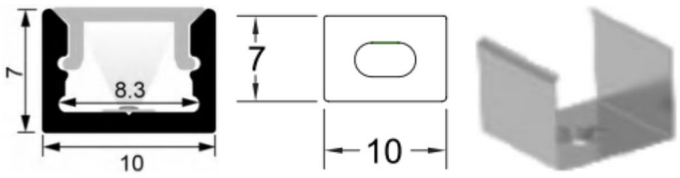



NOTES

- Remote 24Vdc electronic driver to be ordered separately.

- Customisable according to customer needs.
- Surface installation with clips.
- Surface installation without clips (holes to be drilled).