
NOVASPIRIT MAG 13,5×13 30° *Linear luminaire*

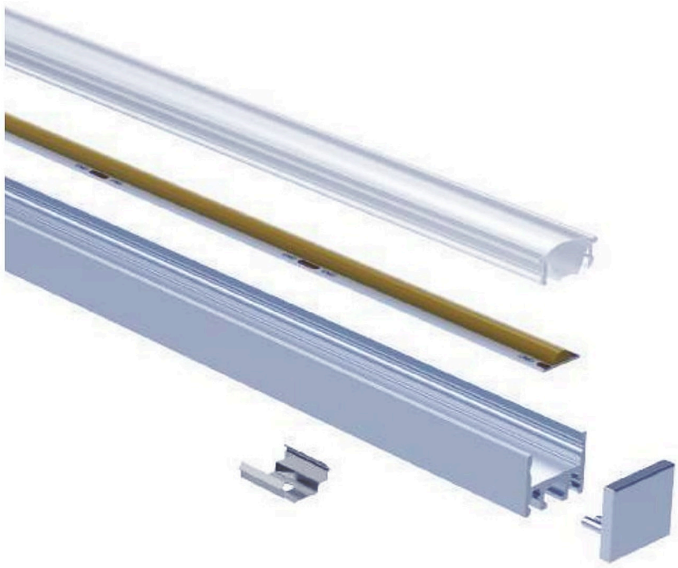

Extruded aluminium profile with plano-convex PMMA lens. Suitable for LED strips from 4.8 W/m up to 24 W/m, with 2835 or 5050 LED packages, including RGBWW. Suitable for IP20 or IP65 LED strips up to 10 mm wide.

LINEAR	IP 20 PROTECTION	CLASS III	24W/m POWER
2700K CCT	90 CRI	30° BEAM	Remote DRIVER

CONTROL: DALI · Triac · 0-10V · Casambi

GENERAL

Category	Linear luminaire
Environment	Indoor
IP rating	IP20
Installation	Ceiling-mounted and recessed
Power	24W/m
Colour temperature	2700K
Colour rendering (CRI)	90
Source flux	1860lm/m

OPTICS

Emission	Direct
LED source	LED SMD
Distribution	Symmetric
Optics	PMMA lens
Beam angle	30°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	0.200Kg/m
Finish	Aluminium
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

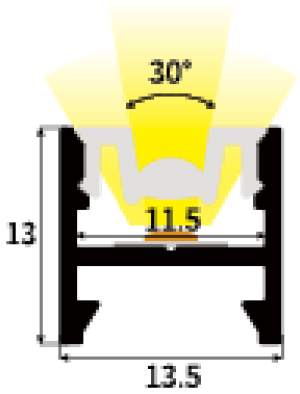

NOTES

- On/Off, Triac, DALI, 0-10V or Casambi with remote driver.
- Fixing with metal clip