ZUMY XS MILL MAG

Surface-mounted zoom projector



Fully customisable and adjustable LED luminaire for installation on ferromagnetic materials, with integrated magnets. The zoom optics allow fine adjustment of the light beam to adapt performance to the architecture of the space. Aluminium body, PMMA lens. Direct light. Paint finish according to RAL and NCS codes. Very high R9 value for naturally saturated red colour rendering.

MAGNETIC	IP 40 PROTECTION	CLASS III	≤ 6W POWER
3000K CCT	98 CRI	8–60° BEAM	Remote DRIVER

CONTROL · ON REQUEST — DALI · Casambi

GENERAL

Category	Surface-mounted zoom projector
Environment	Indoor
IP rating	IP40
Installation	On ferromagnetic materials
Power	Up to 6W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	Up to 750Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct / zoom
LED source	LED COB o Mid Power
Distribution	Symmetric
Optics	PMMA lens, zoom
Beam angle	Zoom 8°/60°


ELECTRICAL

Driver	Remote
Power supply	Adaptable to the electrical circuit
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	0.05Kg
Finish	Any RAL or NCS code
Material	Aluminium
Rotation	+/- 180° · 0 / 90°

TECHNICAL DRAWINGS AND DETAILS

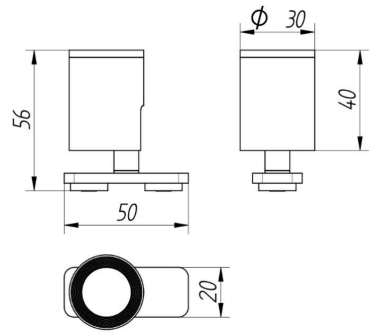

NOTES

- Driver to be ordered separately.
- Mechanical and optical features are fully customisable on request.
- DALI 2 or Casambi dimmable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with custom paint or galvanic finishes (quoted separately).