MINI SET 24VDC *Track*



Tiltable LED track projector for general lighting.
Aluminium body.

TRACK	IP 40 PROTECTION	CLASS III	12W POWER
2700K CCT	95 CRI	38° BEAM	Remote DRIVER

CONTROL · ON REQUEST DALI Casambi

GENERAL

Category	COB LED
Environment	Indoor
IP rating	IP40
Installation	Track installation
Power	12W
Colour temperature	2700K
Colour rendering (CRI)	95
R9	97
Source flux	1266Lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Acrylic refractive optics
Beam angle	38°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	250gr
Finish	Any RAL or NCS code
Material	Aluminium
Rotation	+/- 180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

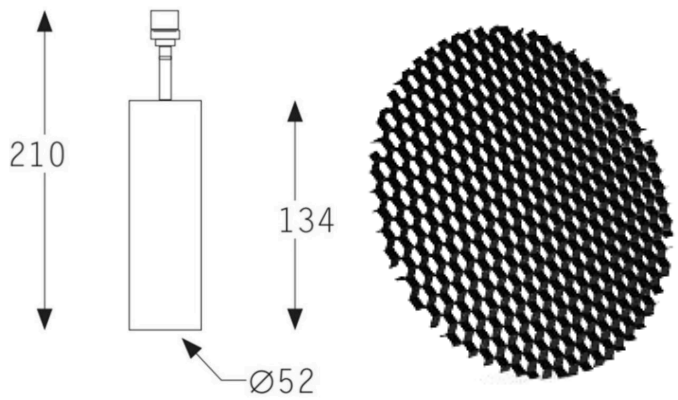

NOTES

- DALI or Casambi dimmable on request.
- Driver to be ordered separately.