MICRO SPIRIT 8×10 MAG *Linear luminaire*



Aluminium profile for LED strips. Heat-dissipating profile in natural anodised aluminium alloy, with opal PMMA diffuser included. Suitable for building custom low-voltage linear luminaires with LED strips up to 5 mm wide. Magnetic fixing for quick installation and maintenance.

LINEAR	CLASS III	14W/m	2700K
		POWER	CCT

>80	175°	Remote
CRI	BEAM	DRIVER

GENERAL

Category	Linear luminaire
Environment	Indoor
Installation	On flat surfaces
Power	14W/m
Colour temperature	2700K
Colour rendering (CRI)	>80
Source flux	1540Lm/m
LEDs per metre	160

OPTICS

Emission	Direct
LED source	LED strip
Distribution	Diffuse
Optics	Opal
Beam angle	175°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	0.05Kg/m
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

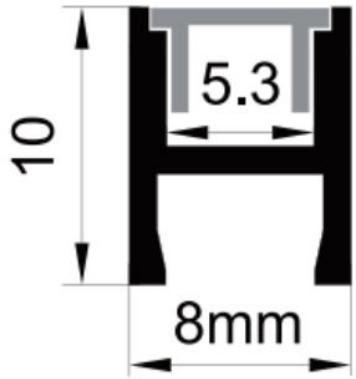

NOTES

- LED strip and remote 24Vdc electronic driver to be ordered separately.
- Customisable according to customer needs.
- Custom small iron plates available for installation on furniture for magnetic fixing.
- Available with opal or satin cover.