# NANO BULLET PENTA THECA MODULE

*Showcases and jewellery displays*



Fully customisable linear LED luminaire for installation in showcases, display cases, displays and furniture. Available in made-to-measure lengths. Beam with dot–line–dot effect, aluminium body, PMMA lens. Direct light. Dimmable.

| SHOWCASE | IP 40 PROTECTION | CLASS III | 14W POWER |
|---|---|---|---|
| 3500K CCT | 90 CRI | 25–45° BEAM | Remote DRIVER |

## GENERAL

| | |
|---|---|
| Category | LED |
| Environment | Indoor |
| IP rating | IP40 |
| Installation | Showcase |
| Power | 14W |
| Colour temperature | 3500K |
| Colour rendering (CRI) | 90 |
| Source flux | 1500Lm |
| Luminaire flux | See photometric data |

## OPTICS

| | |
|---|---|
| Emission | Direct |
| LED source | LED COB |
| Distribution | Symmetric |
| Optics | Refractive optics |
| Beam angle | 2×25° + 5×45° |


## ELECTRICAL

| | |
|---|---|
| Driver | Remote |
| Power supply | 24Vdc |
| Insulation class | III |

## MECHANICAL

| | |
|---|---|
| Dimensions | See drawing |
| Weight | 0.400Kg |
| Finish | Any RAL and NCS code |
| Material | Aluminium |
| Rotation | +/- 90° |
| Tilt | +/- 90° |

### TECHNICAL DRAWINGS AND DETAILS

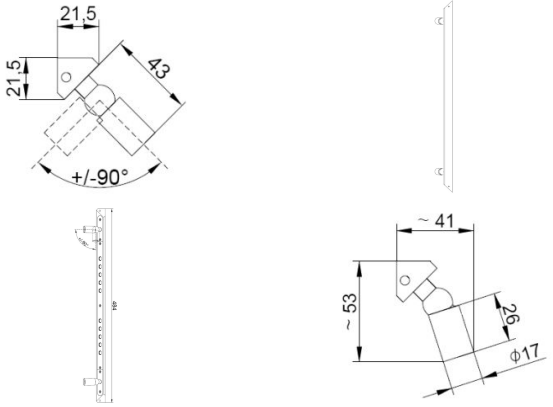


### NOTES

- All features are to be confirmed following prototype analysis.
- Dimmable on request with external remote driver.
- Driver to be ordered separately.
- Mechanical and optical features fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K.