
FEMO UV-CUT

Showcases and jewellery displays

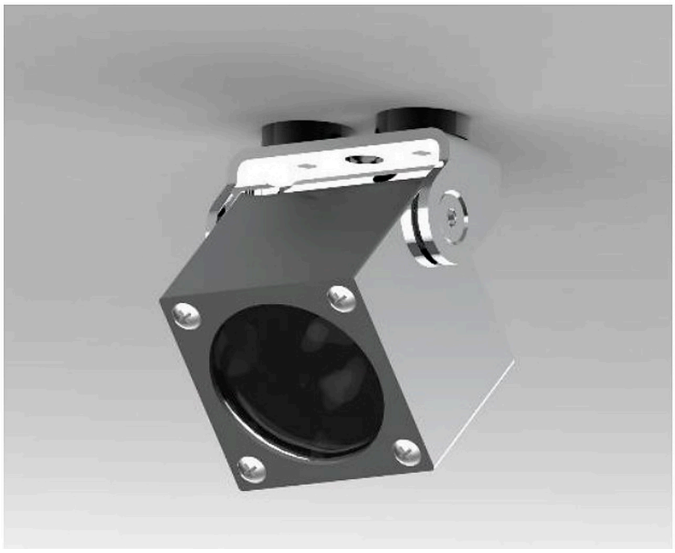

Small, high-efficiency magnetic luminaire with a clean design, for showcases and displays. With UV-Cut filter to eliminate harmful UV frequencies.

SHOWCASE	IP 40 PROTECTION	CLASS III	≤ 4,5W POWER
2700–5000K CCT	>90 CRI	Remote DRIVER	

GENERAL

Category	LED
Environment	Indoor
IP rating	IP40
Installation	On iron plate
Power	Up to 4.5W
Colour temperature	2700K, 3000K, 3500K 4000K, 5000K
Colour rendering (CRI)	> 90
Source flux	Up to 490lm

OPTICS

Emission	Direct
LED source	LED array
Distribution	Symmetric
Optics	Refractive
Beam angle	Spot, medium, wide


ELECTRICAL

Driver	Remote
Power supply	350mA, 500mA, 700mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	40gr
Material	Aluminium
Rotation	+/- 40°
Tilt	+/- 180°

TECHNICAL DRAWINGS AND DETAILS

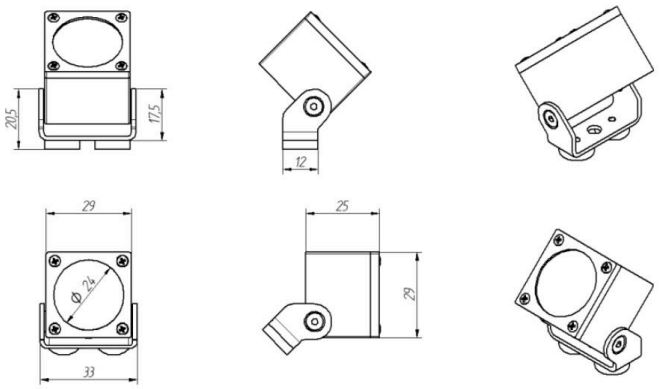

NOTES

- Dimmable with remote driver not included.
- Fully customisable luminaire.
- Only with forced fan ventilation can the spotlight be powered with a 700mA current.