ZUMY M TRACK *Track projector*



Tiltable LED projector on mini track for general lighting. Aluminium body, PMMA lens. Paint finish according to RAL or NCS codes. Very high R9 value, for naturally saturated red colour rendering.

TRACK	IP 40 PROTECTION	CLASS III	12W POWER
4000K CCT	98 CRI	10–60° BEAM	Remote DRIVER

GENERAL

Category	Track projector
Environment	Indoor
IP rating	IP40
Installation	Low-voltage miniaturised track
Power	12W
Colour temperature	4000K
Colour rendering (CRI)	98
R9	97
Source flux	1332Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Zoom refractive optics
Beam angle	10°/60°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	200gr
Finish	RAL 9004
Material	Aluminium
Rotation	360°
Tilt	+/- 180°

TECHNICAL DRAWINGS AND DETAILS

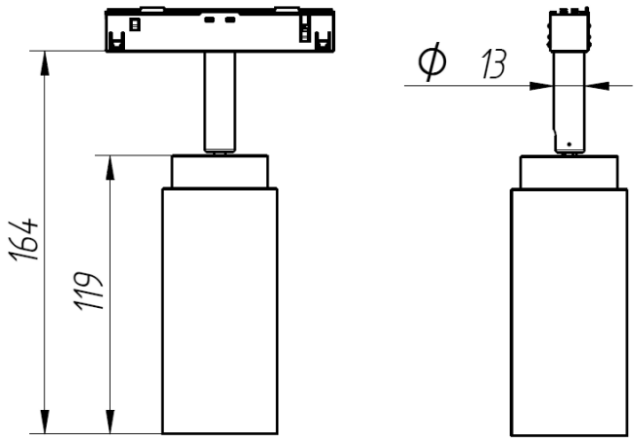

NOTES

- Mechanical and optical features are fully customisable.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.

ACCESSORIES AND OPTIONS

- Optional: gloss black painted collar for anti-glare effect.
- Optional galvanic finishes (e.g. gold, nickel, burnishing).
- Optional: barn doors.