
LEILA 3X RGBW

Surface-mounted RGBW DMX luminaire

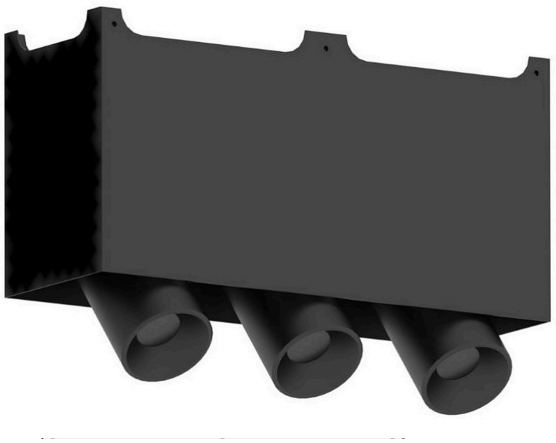

Surface-mounted luminaire with three adjustable and removable spotlights. The LED sources are RGBW, powered at 700mA, and can be controlled in DMX via remote controller and driver, to achieve numerous colour effects and scenes. At the back, the box is designed to house the driver and controller if required. Medium-gloss black finish, with gloss black painted collar for anti-glare effect. Ceiling fixing screws not supplied, to be chosen according to the type of ceiling.

PROJECTOR	IP 40 PROTECTION	CLASS III	8W POWER
RGBW COLOUR	26–40° BEAM	Remote DRIVER	

CONTROL DMX

GENERAL

Category	Surface-mounted RGBW DMX luminaire
Environment	Indoor
IP rating	IP40
Installation	Ceiling-mounted with screws (not supplied)
Power	3×8W total
Colour temperature	Cree R, G, B, W 2700/3200K
Source flux	R 160Lm @ 700mA · G 310Lm @ 700mA · B 46Lm @ 700mA · W 260Lm @ 700mA

OPTICS

Emission	Direct
LED source	Cree RGBW
Distribution	Symmetric
Optics	Colour-mixing refractive optics (to be confirmed)
Beam angle	26°, 40°

ELECTRICAL

Driver	Remote (can also be mounted on the back)
Power supply	700mA
Insulation class	III
Control	Yes, with remote control system

MECHANICAL

Dimensions	See drawing
Weight	850gr
Finish	RAL9005
Material	Aluminium, PMMA
Rotation	359°
Tilt	0/40°


NOTES


- Mechanical and optical features are fully customisable.
- Also available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.

ACCESSORIES AND OPTIONS

- Optional galvanic finishes, quoted separately.

TECHNICAL DRAWINGS AND DETAILS

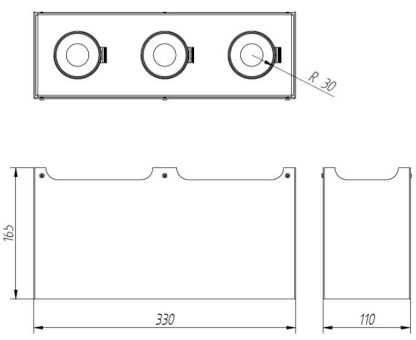

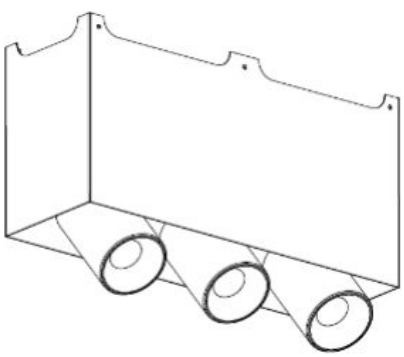

3500K, 4000K, 5000K, 5700K, 6500K.

