
JAGO TRACK M+ *Track*

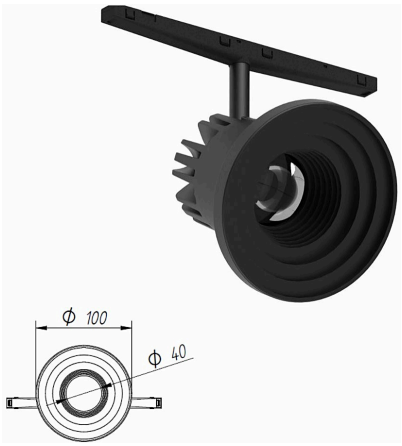

Adjustable, fully customisable LED luminaire for general lighting. Suitable for installation on low-voltage micro track in Class III. Aluminium body, PMMA lens, direct light. Very high R9 value, for naturally saturated red colour rendering.

TRACK	IP 20 PROTECTION	CLASS III	14W POWER
3500K CCT	98 CRI	35° BEAM	Remote DRIVER

GENERAL

Category	LED
Environment	Indoor
IP rating	IP20
Installation	Low-voltage micro track
Power	14W
Colour temperature	3500K
Colour rendering (CRI)	98
R9	97
Source flux	1691Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Spot
Optics	Refractive optics
Beam angle	35°

ELECTRICAL

Driver	Remote
Power supply	24/48Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	400gr
Finish	RAL9005
Material	Aluminium
Rotation	360°
Tilt	90°

NOTES

- Also available in the colour temperatures: 2700K, 3000K, 3500K, 4000K, 5700K, 6500K.
- Available optics: 15°/24°/35°/60°.
- Custom paint finish in RAL and NCS codes.

ACCESSORIES AND OPTIONS

- Anti-glare filter.

TECHNICAL DRAWINGS AND DETAILS

