SET 25W 48VDC *Track*



Adjustable LED track projector for general lighting. Aluminium body, PMMA lens. Made-to-measure paint finishes according to RAL or NCS codes. CRI90 LED source, for a light spectrum with naturally saturated colours.

TRACK	IP 40 PROTECTION	CLASS III	25W POWER
>90 CRI	24° BEAM	Remote DRIVER	

CONTROL · ON REQUEST — DALI · Casambi

GENERAL

Category	COB LED
Environment	Indoor
IP rating	IP40
Installation	Track installation
Power	25W
Colour temperature	300K
Colour rendering (CRI)	>90
Luminaire flux	2507Lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Acrylic refractive optics
Beam angle	24°


ELECTRICAL

Driver	Remote
Power supply	48Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	700gr
Finish	RAL9005, or custom
Material	Aluminium
Rotation	+/- 180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

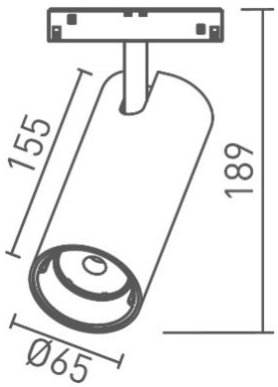

NOTES

- DALI or Casambi dimmable on request.
- Available optics: 15°, 24°, 38°, 60°.
- Available colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K.

ACCESSORIES AND OPTIONS

- Optional: CRI >95.